

Wirebrushed European Oak Drop Click, Glued Down

12MM ENGINEERED CLICK

PRODUCT SPECIFICATIONS


Product / Species	Multi-layer Pre-Finished Engineered Wood Flooring / Oak
Thickness	12 mm / 0.47"
Width	125 mm / 4.92"
Length	400-1210 mm (RL) / 15.74" – 47.63"
Coating Finish	Teknos Treffert UV Coating System (Germany Brand)
Surface Texture	Wirebrushed
Top Layer Type	Sliced Veneer
Top Layer Veneer	1.5 mm / 0.06"
Middle Layer Type	Eucalyptus Plywood
Back Layer Type	Eucalyptus
Edge Detail	Micro -Beveled, 4-Sided Bevel
Board Variation	Low
Installation Method	Drop Click, Glued Down
Radiant Heat	Suitable for use with Hydronic Systems Upto 26°C
Janka Hardness	1360
Gloss Level	5-8%
Suitable Location	On, Above or Below Grade
Certifications	FloorScore Certified / CARB2 Compliant
Warranty	30 Year Residential Ltd. / 5 Year Commercial Ltd.

CARTON SPECS


Packaging	29.28 SQ.FT / Box, 30-36 pcs / Box, 48 Boxes / Skid
Weight	50 lbs. / Box, 2400 lbs. / Skid

FLOOR MOULDINGS & TRIM OPTIONS


ENG HWD STAIRNOSE (FLUSH)

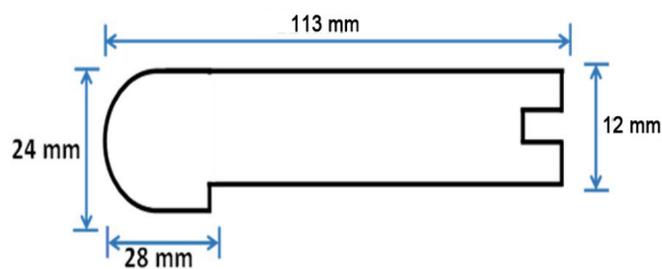

ENG HWD REDUCER (FLUSH)

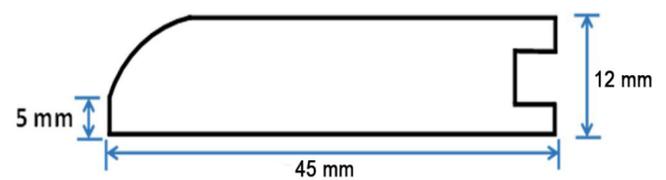

ENG HWD T-MOLDING (OVERLAP)

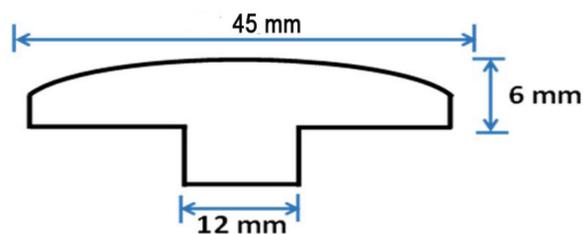

ENGINEERED CLICK
HARDWOOD
Wirebrushed Oak
CARB2 Certified • 12mm x 125mm X 400 - 1210mm (RL)



For illustrative purposes only, each product contains its own distinct character & color variation. Product dimensions are nominal and provided as a guideline.

Visit: WWW.FLOORSATWORK.COM

Veillez vous référer à la 2ème page pour la langue française.

Wirebrushed European Oak Drop Click, Glued Down

12MM D'INGÉNIERIE CLICK

SPECIFICATIONS DU PRODUIT


Produits / Genres	Bois d'ingénierie multicouche préfini / Chêne
Épaisseur	12 mm / 0.47 pouces
Largeur	125 mm / 4.92 pouces
Longueur	400-1210 mm (RL) / 15.74 – 47.63 pouces
Finition du revêtement	Teknos Treffert UV Coating System (marque allemande)
Texture de surface	Brossée à la brosse métallique
Type de couche supérieure	Placage découpé en tranches
Placage de la couche supérieure	1.5 mm / 0.06 pouces
Type de couche intermédiaire	Contreplaqué d'eucalyptus
Type de couche arrière	Eucalyptus
Détail du bord	Micro-biseauté, biseau à 4 côtés
Variation du panneau	Faible
Méthode d'installation	Drop Click, collé
Chaleur rayonnante	convient aux systèmes hydroniques Jusqu'à 26°C
Dureté Janka	1360
Niveau de brillance	5-8%
Emplacement susceptible de convenir	sur, au-dessus ou au-dessous d'une couche
Certifications	Certifié FloorScore / conforme à CARB2
Garantie	Résidentielle limitée 30 ans / Commerciale limitée 5 ans

SPECIFICATIONS DES CARTONS

Emballage	29.28 pi² / Boîte, 30-36 Pcs / Boîte, 48 Boîtes / palette
Poids	50 lbs. / Boîte, 2400 lbs. / palette

MOULURES DE PLANCHER ET CHOIX DE GARNITURE


NEZ DE MARCHE (AFFLEURANT)

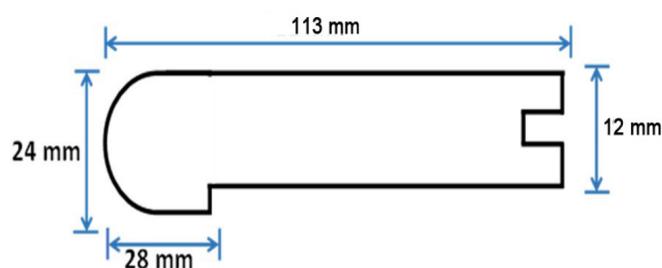

RÉDUCTEUR (AFFLEURANT)



MOULURE EN T (RECOUVREMENT)

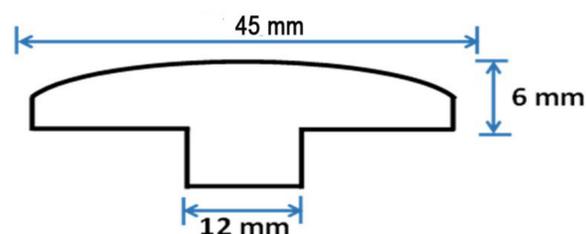

ENGINEERED CLICK
H A R D W O O D
Wirebrushed Oak
CARB2 Certified • 12mm x 125mm X 400 - 1210mm (RL)



A titre d'illustration uniquement. En effet, les différents produits présentent des variations de caractère et de couleur. Leurs dimensions sont nominales et sont données à titre purement indicatif.

Rendez-vous sur : WWW.FLOORSATWORK.COM